



Perfect[®]
EQUIPMENT

PRODUCT CATALOG



- ✓ guaranteed quality
- ✓ customer oriented
- ✓ optimised for trade



TABLE OF CONTENT

- About us 04
- What is an imbalance? 06
- Six options for wheel balancing 07
- Weights 08
 - Zinc 10
 - Steel 11
 - Lead 12
 - Rollholder & accessories 13
 - Installation instruction 14
 - Packaging 15
- Valves 16
 - Assembly instruction 17
 - Snap-in valves 18
 - Clamp-in valves 19
 - Valve accessories 19
- TPMS 20
 - New: TPMS sensor BLE perfect 21
 - Pre-programmed sensors 21
- Tools & accessories 22
- Service 28

LEGEND

Zinc	Aluminum rim	Passenger car	Coated
Lead	Steel rim	Motorcycle	Fingerlift
Steel		Light Truck	

ABOUT US

IMBALANCE

WEIGHTS

VALVES

TPMS

TOOLS

SERVICE

ABOUT US

PERFECT EQUIPMENT® IN EUROPE

PERFECT EQUIPMENT® was introduced in early 2013 to the European market. The brand with a rich tradition and more than 75 years of experience is known in the North-American market as the largest US brand for wheel balancing weights. In Europe, PERFECT EQUIPMENT® is represented in the market with a clearly structured product portfolio especially adapted to the workshop. The product assortment offers guaranteed quality for best work results and it includes - in addition to universal passenger car wheel balancing weights - also passenger car valves, tools and other wheel accessories.



WHEEL BALANCING WEIGHTS – MADE IN GERMANY*




PERFECT EQUIPMENT® with headquarters in Veitshöchheim in Lower Franconia is a brand by WEGMANN automotive, the world market leader for wheel balancing weights. With production locations in Germany, Europe-wide distribution centers and worldwide sales subsidiaries, WEGMANN automotive is globally oriented. Furthermore, WEGMANN automotive is a supplier to all popular automotive manufacturers as well as the leading spare parts retail organizations on the American, European and Asian continents.

WEGMANN automotive is part of the Wegmann Group, which also includes KNDS and Schleifring. The group is headquartered in Munich and counts more than 6,000 employees.

EVERYTHING FOR THE WHEEL!

The PERFECT EQUIPMENT® brand offers workshop tested universal weights for almost all rims as well as standard valves, tools and other accessories at an attractive price. So everything for the wheel from a single source: Guaranteed quality, customer oriented, retail optimised.

MultiFIT – PERFECT EQUIPMENT® with its selected product program for wheel balancing weights offers a compact solution for all popular rims. Handling is simplified and application errors are prevented by using universal weights. Another benefit of the MultiFIT line is the reduction of warehousing costs.

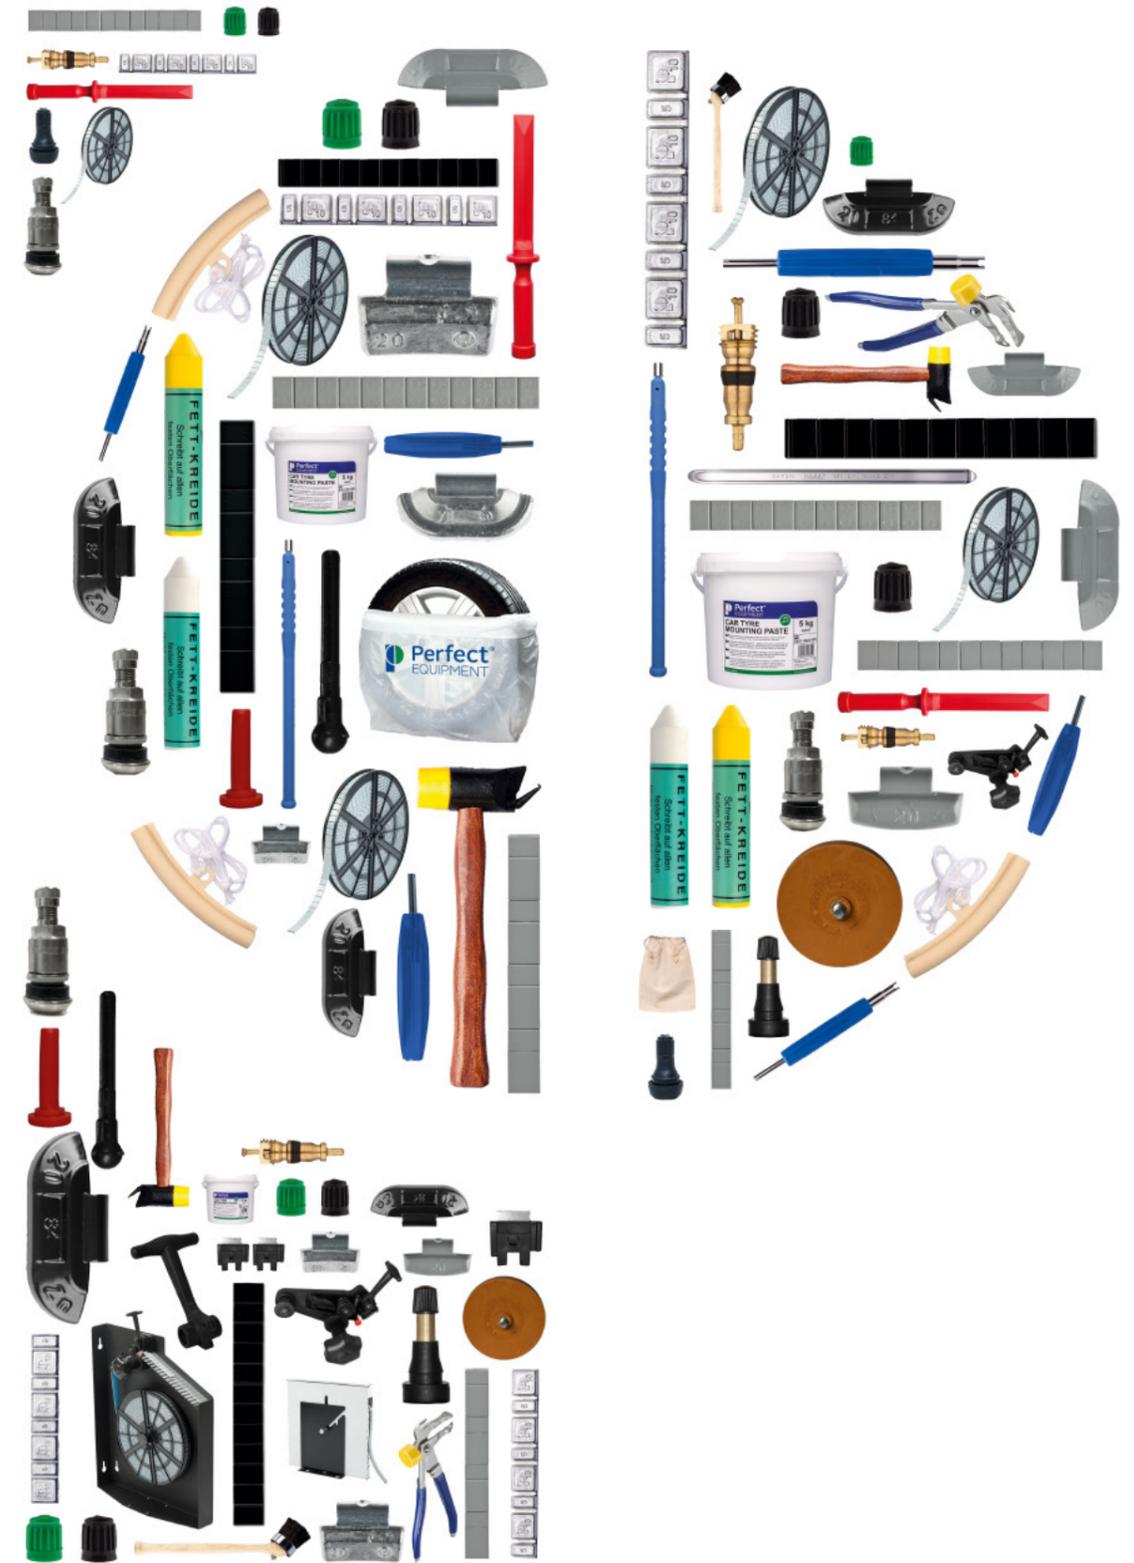


* Applies to products made from zinc and lead.

WHAT DOES IMBALANCE MEAN?



Video-Tutorial: Imbalance

This tutorial explains how to recognize an unbalance of the wheels and why you should pay attention to these signs.

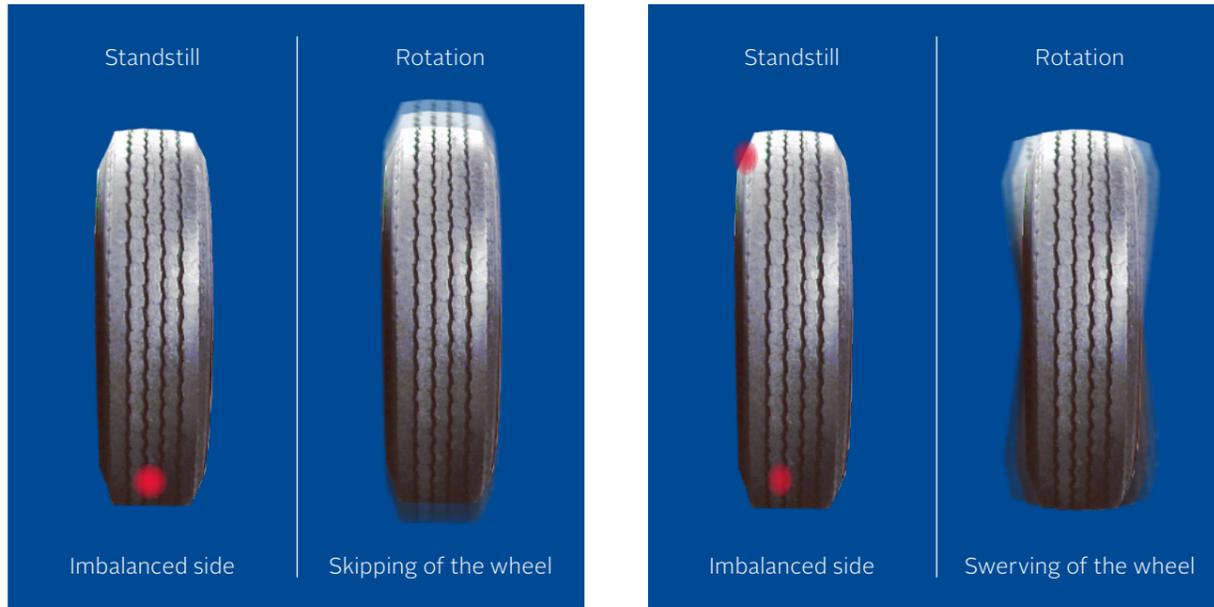

STATIC IMBALANCE

DYNAMIC IMBALANCE

DRIVING COMFORT? ONLY WITH BALANCED WHEELS!

Balancing the wheels:

- Improves driving comfort
- Saves money by reducing wear
- Improves handling and braking of the vehicle
- Is considered an indispensable part of professional wheel and tire changing by all automobile manufacturers

HOW TO CORRECT IMBALANCE?


To fix imbalances, you need to measure where the uneven masses occur. Application of counterweights according to measuring results will correct static as well as dynamic imbalances. The wheel will roll smoothly and reliably even at high speeds.

THE SIX OPTIONS FOR BALANCING




Video-Tutorial: Imbalance

This short video shows the different types of imbalances. It also explains why it is so important to avoid imbalances.

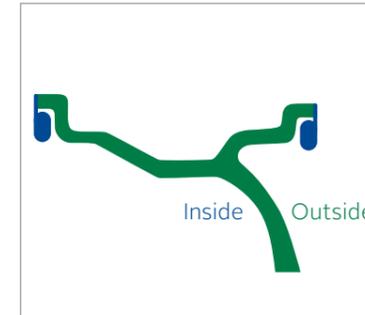


BALANCING OPTION 1

Balancing using knock-on weights for both levels. This type requires least mass for balancing. Most car manufacturers use this option.

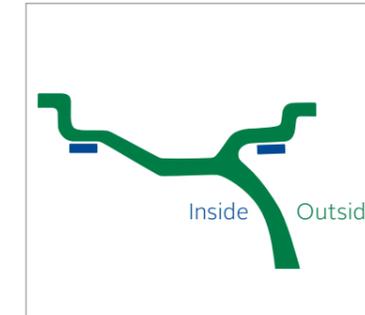


BALANCING OPTION 2

Balancing by using adhesive weights for both levels. The weights are affixed to the inner or outer side of the wheel in the outer-most positions.

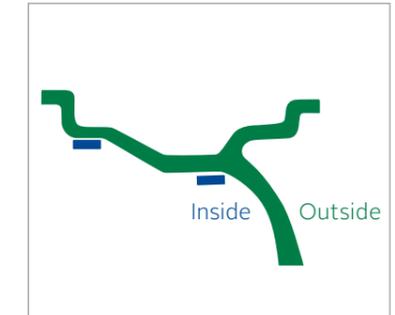


BALANCING OPTION 3

Both adhesive weights are affixed to the center of the wheel rim in the inside part of it. The external balance level is in this case transferred back behind the spokes.

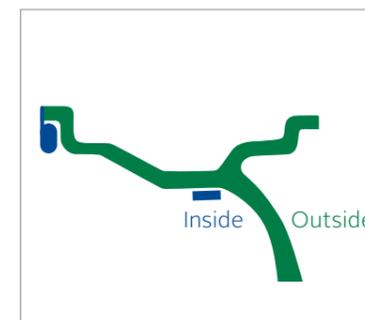


BALANCING OPTION 4

The outer balancing level is relocated inside and the adhesive weight is attached to the center of the rim, in the brake disc area. A knock-on weight is attached to the inner wheel rim flange.

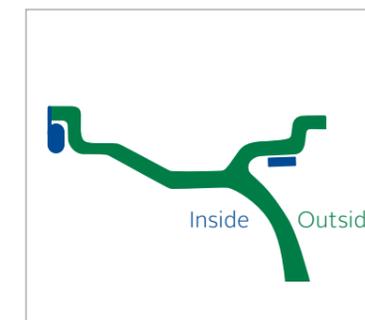

BALANCING OPTION 5

An adhesive weight is used on the outside of the rim. It is attached to the outer-most position of the wheel. A knock-on weight is used on the inner wheel rim flange.

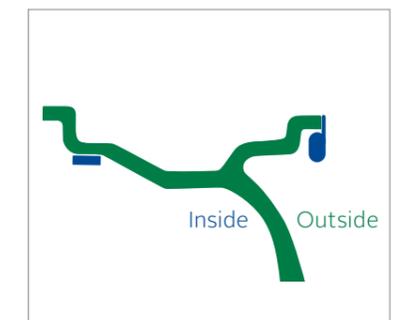

BALANCING OPTION 6

At the outer side of the wheel rim, a knock-on weight is used at the rim flange. An adhesive weight is used on the inside of the wheel rim. The weight is affixed to the rim center in the outermost position.



WEIGHTS

KEY FACTS ABOUT WEIGHTS

PRODUCT ADVANTAGES KNOCK-ON WEIGHTS

Based on a special coating process, PERFECT EQUIPMENT® knock-on weights are covered completely with a closed coating powder layer. This protects the weight and the rim reliably against galvanic corrosion. The proven design guarantees a safe function. The flat profile provides especially a good alignment with the rim and permits the smooth installation of hub caps.



1) Material:

- High quality zinc

2) Coating*:

- Quality powder coating protects the entire weight against corrosion
- Salt spray test > 250 h
- Impact resistant coating powder in silver or black
- Metallic effect matching the rim colours

3) Clip:

- High clip clamping force for a good seat
- No displacement of the weight even under extreme conditions
- Fitting the rim optimally

4) Design:

- MultiFIT - Universal fit for almost all popular rim types
- Developed for retail
- Made in Germany

PRODUCT ADVANTAGES ADHESIVE WEIGHTS

The universal adhesive weights and rolls are ideal if aluminum rims must be balanced discretely. The high quality adhesive tape and the good forming capabilities simplify the use in the workshop and provide the best work results. By offering different profiles, colours and rolls, PERFECT EQUIPMENT® offers the matching solution for each preference.



1) Material:

- High value quality zinc and quality steel

2) Coating*:

- Quality powder coating protects the entire weight against corrosion
- Salt spray test > 250 h
- Impact resistant coating powder in silver or black
- Metallic effect matching the rim colours

3) Adhesive tape:

- Quality double-sided tape with protective film and fingerlift-tape
- Best adhesive characteristics with a guaranteed adhesive force of 35N/cm²

4) Design:

- Application optimised
- Clean processing
- Smooth surface

*not valid for "U" variants (uncoated or zink plated)

ZINC WHEEL BALANCING WEIGHTS



TYPE 84 | TYPE 84B

Knock-on weight for steel rims

Zinc weight with powder coating available in silver (Type 84) or black (Type 84B). The special shape of the weight permits a universal application on almost all steel rims. Including French vehicles and light weight trucks.

Variants:
 • Type 84 (silver) Item No. 3184-OXX2-151
 • Type 84B (black) Item No. 3184-OXX2-651

Weight sizes: 5 g, 10 g, 15 g, 20 g, 25 g, 30 g, 35 g, 40 g, 45 g, 50 g
 Packaging unit: 5-30 g: 100 pcs | 35-50 g: 50 pcs



TYPE 63


Knock-on weight for alloy rims

Zinc weight with powder coating in silver. The special shape of the weight permits a universal application on almost all alloy rims.

Weight sizes: 5 g, 10 g, 15 g, 20 g, 25 g, 30 g, 35 g, 40 g, 45 g, 50 g
 Packaging unit: 5-30 g: 100 pcs | 35-50 g: 50 pcs



Item No. 3663-OXX2-151

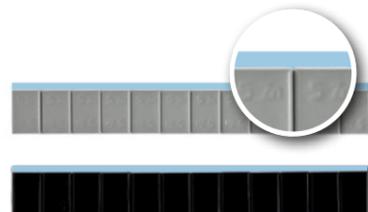

TYPE 371 | TYPE 371B

Adhesive weight for alloy rims

Zinc adhesive weight bar with 5 g segments. Equipped with protruding liner for easy handling.

Variants:
 • Type 371 (silver/fingerlift) Item No. 3371-0601-251
 • Type 371B (black/fingerlift) Item No. 3371-0601-751

Dimensions: Width: 19 mm, Height: 3.8 mm (incl. adhesive tape)
 Segmentation: 12 x 5 g (60 g)
 Packaging unit: 100 pcs



TYPE 371R


Adhesive roll for alloy rims

Zinc endless adhesive weight with 1,000 segments of 5 g each with powder coating in silver on a roll. Easily cut. Equipped with protruding liner for easy handling.

Dimensions: Width: 19 mm, Height: 3.8 mm (incl. adhesive tape)
 Segmentation: 1,000 x 5 g (5 kg)
 Packaging unit: 1 roll
 Available accessories: Unwind and cutting device MASTER-CUT (optional with stable floor stand) or roll bracket Type 2800.



STEEL WHEEL BALANCING WEIGHTS

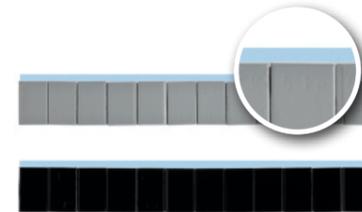

TYPE 397 | TYPE 397B | TYPE 397U

Adhesive weight for alloy rims

Steel adhesive weight bar with 5 g segments. Equipped with protruding liner for easy handling.

Variants:
 • Type 397 (silver/fingerlift) Part. No. 3397-0601-251
 • Type 397U (zinc plated/fingerlift) Part. No. 3397-0601-551
 • Type 397B (black/fingerlift) Part. No. 3397-0601-751

Dimensions: Width: 19 mm, Height: 3.8 mm (incl. adhesive tape)
 Segmentation: 12 x 5 g (60 g)
 Packaging unit: 100 pcs



TYPE 397R | TYPE 397RB | TYPE 397RU

Adhesive roll for alloy rims

Steel endless adhesive weight with 1,000 segments of 5 g each on a roll. Easily cut. Equipped with protruding liner for easy handling.

Variants:
 • Type 397R (silver/fingerlift) Item No. 3397-0051-259
 • Type 397RU (zinc plated/fingerlift) Item No. 3397-0051-559
 • Type 397RB (black/fingerlift) Part.-No.:3397-0051-759

Dimensions: Width: 19 mm, Height: 3.8 mm (incl. adhesive tape)
 Segmentation: 1,000 x 5 g (5 kg)
 Packaging unit: 1 roll
 Available accessories: Double roll holder with cutter and stand or roll bracket Type 2800.



TYPE 398 | TYPE 398B | TYPE 398U

Adhesive weight for alloy rims

Steel adhesive weight bar with 5 g | 10 g segments. Equipped with protruding liner for easy handling.

Variants:
 • Type 398 (silver/fingerlift) Item No. 3398-0601-251
 • Type 398U (zinc plated/fingerlift) Item No. 3398-0601-551
 • Type 398B (black/fingerlift) Item No. 3398-0601-751

Dimensions: Width: 19 mm, Height: 3.8 mm (incl. adhesive tape)
 Segmentation: 4 x 5 g + 4 x 10 g (60 g)
 Packaging unit: 100 pcs



LEAD WHEEL BALANCING WEIGHTS

INFORMATION ABOUT THE USE OF LEAD WEIGHTS These weights are NOT in accordance with the EU old car regulation 2000/53/EG and must therefore - within this EU directive - not be used for vehicles of the classes M1 and N1.



TYPE 5

Item No. 4105-OXX2-051

Knock-on weight for passenger car steel rim

Uncoated lead weight, dismantling hole offset to the front for easy removal of the weight.

Weight sizes: 5 g, 10 g, 15 g, 20 g, 25 g, 30 g, 35 g, 40 g, 45 g, 50 g
Packaging unit: 5-30 g: 100 pcs | 35-50 g: 50 pcs



TYPE 16

Item No. 4616-OXX2-051

Knock-on weight for passenger vehicle alloy rims

Uncoated lead weight with short clip for rims with a small tight section.

Weight sizes: 5 g, 10 g, 15 g, 20 g, 25 g, 30 g, 35 g, 40 g, 45 g, 50 g
Packaging unit: 5-30 g: 100 pcs | 35-50 g: 50 pcs



TYPE 3

Item No. 4303-0602-551

Adhesive weight for alloy rims

Uncoated lead adhesive bar especially suited for rims with a small width of the balancing track; can also be used for some motorcycle rims.

Dimensions: Width: 15 mm, Height: 5 mm (incl. adhesive tape)
Segmentation: Division in 4 x 5 g and 4 x 10 g (60 g)
Packaging unit: 100 pcs



TYPE 13

Item No. 4313-0602-551

Adhesive weight for alloy rims

Uncoated lead adhesive bar, especially suitable if only a small installation space is available between brake system and rim.

Dimensions: Width: 18 mm, Height: 3.8 mm (incl. adhesive tape)
Segmentation: Division in 4 x 5 g and 4 x 10 g (60 g)
Packaging unit: 100 pcs



ROLLHOLDER AND ACCESSORIES



DOUBLE ROLL HOLDER WITH STAND

Item No. 0401-1001-024

Double roll holder for attaching and processing two adhesive weight rolls. With integrated cutter for easy and injury-free cutting of the weights. Two magnets hold the weight strip in position and prevent it from slipping back into the cardboard box. With stand for easy and stable installation in the workshop.

Packaging unit: 1 pc



REPLACEMENT BLADE DOUBLE ROLL HOLDER

Item No. 0401-0023-173

Replacement blade for double roller holder. For easy replacement of wear-out cutting blades.

Packaging unit: 1 pc



TYPE 2800

Item No. 2800-4801-002

The rollholder is suited for all 5 kg adhesive weight rolls of PERFECT EQUIPMENT®. Multi functional for the installation on the work bench or at the wall. The roll is available separately.

Packaging unit: 1 pc

INSTALLATION INSTRUCTION

KNOCK-ON AND ADHESIVE WEIGHTS

KNOCK-ON WEIGHTS



1. SELECTION OF A SUITABLE WEIGHT

Before installing, the weight is selected on the basis of the rim. The build of the rim is used for differentiation. Before installation to the rim, apply the weight to check its fit.



2. PLACE THE WEIGHT ON THE RIM

Place the weight at the correct location of the imbalance. Before you knock on the weight with a hammer, make sure that the clip touches the rim flange. The actual body of the weight should not touch the rim.



3. KNOCK ON THE WEIGHT

After correctly aligning the weight, knock on with the corresponding installation hammer. Do not use more than two strong hits for installation. Note: Increasing the impact number can damage the weight coating.



4. CHECK CORRECT FIT OF THE WEIGHT

We recommend a second inspection to confirm the weight is attached firmly after installation.



1. PRELIMINARY WORK

Ensure that the weight, rim and ambience temperatures are at least 16 °C. Clean the wheel rims with a suitable cleaning agent to avoid grease and silicone residue on the rim (e.g. isopropanol 70%).



2. ADJUSTMENT OF THE ADHESIVE WEIGHT TO THE RIM SHAPE

Adjust the adhesive weight to the rim radius with the protective film. The radius of the weight body and the rim must be at least parallel to each other. It is even better if the radius of the weight body is less than that of the rim.



3. REMOVAL OF THE PROTECTIVE FILM

Remove the protective film from the adhesive tape after adjusting the weight to the rim radius. Do not touch the adhesive tape before attaching it to the wheel!



4. WEIGHT INSTALLATION

Now press the weight against the rim from the centre towards the outer edge. The pressure should be at least 1 kg/cm².

ADHESIVE WEIGHTS

PACKAGING



EVERYTHING AT A GLANCE NEW DESIGN PROVIDES A BETTER OVERVIEW

The packaging design by Perfect EQUIPMENT® addresses especially the requirements of the retailers and the workshops. We focus on the fast identification of the most important information - customer oriented and retail optimised. This is why the type designation and the weight size on the label are written with an especially large font. The product image of the weight, the brief description and the part number clearly identify each type and do not leave any open questions. The packaging quantity can also be read immediately. Additional symbols for material, rim type and coating/colour complete the information.

Type	TYPE 397	Product Image
Description	adhesive weight	
Part Number	PN 3397-0602-251	Quantity
Material Information	100 pcs	Weight Size
	12x5 g	

Additional information on the label includes: Barcode (4 04925 10151), QR code, Material (Fe - Made of Steel), Alloy Wheels, Passenger Cars, Coated, Part Number (2310NTC7*0UV), Manufacturer (WEGMANN automotive GmbH, Rudolf-Diesel-Straße 6, 7209 Veitshöchheim), and Website (www.perfectequipment.com).

Callouts for Rim Type, Vehicle Type, and Coating are also present at the bottom of the label.

ABOUT US
IMBALANCE
WEIGHTS
VALVES
TPMS
TOOLS
SERVICE



VALVES

KEY FACTS ABOUT VALVES



Video-Tutorial: Valves

All important information about car tire valves is available in this tutorial.

PRODUCT ADVANTAGES VALVES

PERFECT EQUIPMENT® valves are optimized for the workshop and are made of high-quality material. The material is highly resistant and therefore guarantees protection against environmental influences and mechanical wear. All products are subject to a strict, 100% quality control of the core functions.



- Product line includes all common valves for passenger cars
- Suitable for ETRTO rims
- Workshop proven

ASSEMBLY INSTRUCTION SNAP-IN VALVES

1. CHOOSING THE RIGHT VALVE

Ø	TR
11,3 mm	412
	413
	414 (L)
	418
	600HP
15,7 mm	415

Choose the right valve as per the dimension of rim hole.



The valve stem should not extend out the rim flange.

2. CHECKING THE RIM HOLE



NOTE: For wheels with speeds above 210 km/h, check that the rim is approved for Snap-in valves. If not, use Clamp-in valves.

The rim hole has to be without grooves, damages and dirt, and has to be in accordance with the regulations of ETRTO.

3. VALVE INSTALLATION



Lubricate the Snap-in valve with a mounting paste to decrease the friction between valve and rim hole, avoiding the valves surface damage.



Use a suitable valve mounting tool. Do not stretch the valve to avoid damages. The pull-through of the valve has to take place in a straight line to the valve hole – do not tilt!

4. VALVE INSPECTION



Check the valve seat.



Inspect whether there is any damage or crack caused by installation on the valve surface.

Tools and accessories can be found from page 23 onwards

SNAP-IN VALVES

RIM VALVES FOR TUBELESS TIRES OF PASSENGER CARS



Item No.	TR	Version	ETRTO	A in mm	Ø Rim hole in mm	QTY	Vehicle Type
0401-0023-230	TR412	assembled	V2.03.6	33	11,3	100	
0401-0023-231	TR412	partly assembled	V2.03.6	33	11,3	100	
0401-0023-233	TR412	unassembled	V2.03.6	33	11,3	100	
0401-0023-063	TR413	assembled	V2.03.1	42,5	11,3	100	
0401-0023-211	TR413	partly assembled	V2.03.1	42,5	11,3	100	
0401-0023-215	TR413	unassembled	V2.03.1	42,5	11,3	100	
0401-0023-064	TR414	assembled	V2.03.2	48,5	11,3	100	
0401-0023-201	TR414	partly assembled	V2.03.2	48,5	11,3	100	
0401-0023-205	TR414	unassembled	V2.03.2	48,5	11,3	100	
0401-0023-204	TR414L	assembled	V2.03.8	56,5	11,3	100	
0401-0023-206	TR414L	partly assembled	V2.03.8	56,5	11,3	100	
0401-0023-207	TR414L	unassembled	V2.03.8	56,5	11,3	100	
0401-0023-027	TR415	assembled	V2.03.3	42,5	15,7	100	
0401-0023-065	TR418	assembled	V2.03.4	61,5	11,3	100	
0401-0023-221	TR418	partly assembled	V2.03.4	61,5	11,3	100	
0401-0023-222	TR418	unassembled	V2.03.4	61,5	11,3	100	

At speeds above 210 km/h please use Clamp-in valves.
Maximum working pressure at room temperature: 4,5 bar

RIM VALVES FOR TUBELESS TIRES OF LIGHT TRUCKS



Item No.	TR	Version	ETRTO	A in mm	Ø Rim hole in mm	QTY	Vehicle Type
0401-0023-200	TR600 HP	assembled	V3.23.1	44	11,3	100	

Maximum working pressure at room temperature: 5,5 bar
At speeds above 210 km/h please use Clamp-in valves.

CLAMP-IN VALVES

RIM VALVES FOR TUBELESS TIRES OF PASSENGER CARS AND LIGHT TRUCKS

CHROME-PLATED BRASS VALVES

Item No.	Description	Version	A in mm	Ø Rim hole in mm	QTY	Vehicle Type
0401-0023-252	42MS11,3	assembled	42	11,3	100	

Installation torque: 3-5 Nm
Maximum working pressure at room temperature: 14 bar / 203 psi

ALUMINUM VALVES

Item No.	Description	Version	A in mm	Ø Rim hole in mm	QTY	Vehicle Type
0401-0023-332	42MS11,3 black	assembled	42	11,3	20	

Installation torque: 3-5 Nm
Maximum working pressure at room temperature: 14 bar / 203 psi

VALVE ACCESSORIES

VALVE CAPS

Item No.	Description	QTY	Vehicle Type
0401-0023-271	Plastic valve cap with sealing, green	100	
0401-0023-272	Plastic valve cap without sealing, black	100	
0401-0023-273	Plastic valve cap with sealing, black	100	



VALVE CORE

Item No.	Description	QTY	Vehicle Type
0401-0023-279	Brass valve core TRC1, short	100	





TPMS

TPMS SENSOR BLE PERFECT

FOR TESLA

OE replacement sensor for Tesla models 3/S/X/Y

OE PERFORMANCE & FUNCTION

Aftermarket sensor with equivalent OE functionality & Bluetooth-Low-Energy Technology (BLE).

PRE-PROGRAMMED TPMS SENSOR

No programming necessary. Install - relearn - go!

RELEARN PROCEDURE:

- Install new sensors
- Drive for 1 km (to distance the old sensors from the vehicle)
- Turn off the car and wait 5 minutes
- Drive up to 10 minutes to complete the relearn.

* The valve must have a service whenever a technician breaks the tire bead. The warranty will not cover an over-the-air software update (vehicle related) that affects the TPMS setup



PRODUCT DETAILS	
Article number	0401-0122-001
Packing	1 x sensor with valve
Warranty (Sensor)	2 years or 40.000 km*
Valve	Metal clamp-in valve, titanium gray
Coverage	Model 3 (10/2020-12/2027) Model S (06/2021-03/2031) Model X (10/2022-09/2029) Model Y (10/2020-03/2031)
Battery	Long battery life due to BLE & smart sleep mode (depending on km driven, age of sensor, driving conditions & environmental influences)

PRE-PROGRAMMED SENSORS

PRE-PROGRAMMED

SELECT VEHICLE - INSTALL - RELEARN - DONE!

Save time and money and use the ready-to-install OER sensors from PE – the efficient alternative to the original sensors of the original equipment manufacturers! No further sensor programming or configuration needed.

HIGH VEHICLE COVERAGE EVERYTHING FROM A SINGLE SOURCE

At PERFECT EQUIPMENT® you will find the right sensor for the most common vehicles since the introduction of the TPMS obligation! With the high vehicle coverage of our OER sensors you can cover all volume models from 2014. Further vehicle models are constantly being added.



PRODUKTDETAILS	
Article number	0401-0122-XXX Sensor silver 242 - 340* Sensor black 412 - 457*
Maximum pressure	8 bar / 115 psi
Sensor Warranty	36 months or 60.000 km
Packaging unit	4 pieces

* Please check the exact vehicle type in the cover list.



SCAN ME: Current vehicle coverage

- 🕒 INSTALL, RELEARN, GO!
- 📶 SUPPORTS ALL RELEARN PROCEDURES
- 🛡️ VALVES WITH EXCELLENT CORROSION PROTECTION
- 🛒 SERVICE KITS AVAILABLE AS SPARE PARTS

TOOLS AND ACCESSORIES

Item No. 0401-0025-004



BAG FOR WHEEL NUTS

For the storage of wheel nuts
15x20 cm (beige coloured).

Packaging unit: 50 pcs

Item No. 3406-0045-001



TALCUM POWDER CONTAINER 400G

For gentle assembly and care. Prevents tubular tires, seals, and rubber parts from sticking together. Water-repellent, asbestos-free, and biodegradable.

Packaging unit: 15 pcs (400g)



MARKING CHALK

Grease marking chalk - for the marking of tires. Writes on all solid surfaces, does not smudge and it's break resistant.

Ø 17.5 mm.

- White Item No. 0401-0025-007
- Yellow Item No. 0401-0025-008

Packaging unit: 1 box with 12 pcs each

Item No. 0401-0025-044



CHALK HOLDER

For marking chalk Ø 17,5 mm.

Packaging unit: 1 pc



Item No. 0401-0001-000

WHEEL BALANCING WEIGHT PLIERS

For the attachment, removal and separation of wheel balancing weights. With plastic cap to protect the weight coating.

Packaging unit: 1 pc

Item No. 0401-0025-038



SCRAPER

For the easy and gentle removal of adhesive weights. High quality, robust plastics. Blade width 22.5 mm.

Packaging unit: 1 pc

Item No. 0401-0023-060



VALVE SCREW DRIVER, SINGLE

For screwing in and out standard valve inserts (car+truck). Plastic, nickel-plated metal.

Packaging unit: 1 pc

Item No. 0401-0025-014



VALVE SCREW DRIVER, DOUBLE ENDED

For screwing in and out standard and EM valve inserts (car, truck, EM). Plastic, nickel-plated metal.

Packaging unit: 1 pc

TOOLS AND ACCESSORIES

ABOUT US

IMBALANCE

WEIGHTS

VALVES

TPMS

TOOLS

SERVICE

TOOLS AND ACCESSORIES



Item No. 0401-0025-061

SNAP-IN VALVE INSERTION LEVER FOR TRUCKS

Enables ergonomic, fast working when inserting snap-in valves. Particularly robust design.

Packaging unit: 1 pc



Item No. 0401-0025-062

LONG TIRE LEVER FOR TRUCKS

Supports the safe mounting of tires on the rim. Made of forged CV steel, hardened and tempered. Length: 76 cm

Packaging unit: 1 pc



Item No. 0401-0023-059

VALVE LEVER FOR PASSENGER CARS

For installing snap-in valves. Made of metal and high-strength plastic to protect the rim.

Packaging unit: 1 pc



Item No. 0401-0025-010

TIRE LEVER FOR PASSENGER CARS

For the installation of tires on the rim, made from chrome-vanadium steel. Length 600 mm.

Packaging unit: 1 pc



Item No. 0401-0025-011

RIM FLANGE PROTECTOR

Protects the rim against damages during the installation of the tire using a tire lever.

Packaging unit: 1 pc



Item No. 0401-0028-361

RUBBER DISC

For removing foam and adhesive residues on the rim. Ø 90 mm incl. adapter.

Packaging unit: 1 pc



Item No. 0401-0025-013

KNOCK-ON WEIGHT HAMMER

For the installation of knock-on weights at the rim. With arbor for the removal of knock-on weights and plastic cap for protecting the weight coating.

Packaging unit: 1 pc



Item No. 0401-0025-015

REPLACEMENT HORN FOR KNOCK-ON WEIGHT HAMMER

Robust replacement part for the hammer head of the knock-on weight hammer (0401-0025-013). Durable and easy to replace.

Packaging unit: 5 pcs

TOOLS AND ACCESSORIES



Item No. 0401-0025-046
Brush head Ø 40 mm
Item No. 0401-0025-047
Brush head Ø 55 mm
Item No. 0401-0025-048
Brush head Ø 60 mm

SPECIAL BRUSH FOR MOUNTING PASTE

Angled for easy use, robust bristles for long life and ideal for applying mounting paste.

Packaging unit: 1 pc



Item No. 0401-0025-049

REPLACEMENT HEAD

Enables clean and precise application of assembly pastes. Robust bristles, durable and quick to replace. Suitable for brush 0401-0025-048. Ø 60 mm.

Packaging unit: 1 pc



Item No. 0401-0025-050

FLAT BRUSH

For even application of mounting paste and fluid. Sturdy bristles and stable wooden handle for cars and trucks. Facilitates professional tire mounting.

Packaging unit: 1 pc



Item No. 0401-0025-052

ALL-PLASTIC BRUSH

For gentle cleaning without scratching aluminum and sensitive surfaces. Ideal for hard-to-reach, narrow spaces.

Packaging unit: 2 pc



Item No. 0401-0025-051

SPECIAL BRUSHES FOR TRUCKS AND AGRICULTURAL VEHICLES

For quick stirring and optimal foam formation in assembly pastes. Ideally suited for use with viscous pastes (e.g., TRAX - TIGER).

Packaging unit: 1 pc



Item No. 0401-0025-001

SHORT BRUSH FOR MOUNTING PASTE

Suitable for finer dosing and easy to clean thanks to the plastic handle.

Packaging unit: 1 pc



Item No. 0401-0025-005

TIRE BAGS

For transporting and storing tires and complete wheels up to and including 21 inches.

Dimensions: W80, H107, D30 cm

Packaging unit: 1 block of 100 pcs



Item No. 0401-0025-065

TIRE BAGS XL

For optimum protection during transport and storage of tires and complete wheels from 22 inches. OE quality.

Dimensions: W90, H117, D30 cm

Packaging unit: 1 block of 50 pcs

MOUNTING PASTES

THREE VISCOSITIES: SOFT, UNIVERSAL, HARD

The right consistency for every application.

HIGH LUBRICITY

For easy mounting & tight fit of the tire.

NEUTRAL

Chemically neutral to rubber, steel and aluminum.

VEGAN

All mounting pastes are environmentally friendly and biodegradable.



PRO TIRE MOUNTING FLUID Item No. 3405-0505-003	
Consistency:	Liquid
Application:	● ● ● ● ●
How many tires:	● ● ● ● ●
Lubricity:	● ● ● ● ●
Drying:	● ● ● ● ●



BLACK UNIVERSAL Item No. 3401-050-101	
Consistency:	Creamy, medium
Application:	● ● ● ● ●
How many tires:	● ● ● ● ●
Lubricity:	● ● ● ● ●
Drying:	● ● ● ● ●



WHITE UNIVERSAL Item No. 3401-0505-001	
Consistency:	Creamy, medium
Application:	● ● ● ● ●
How many tires:	● ● ● ● ●
Lubricity:	● ● ● ● ●
Drying:	● ● ● ● ●



PRO TRANSPARENT UNIVERSAL Item No. 3402-0505-003	
Consistency:	Creamy, medium
Application:	● ● ● ● ●
How many tires:	● ● ● ● ●
Lubricity:	● ● ● ● ●
Drying:	● ● ● ● ●



NFZ MOUNTING WAX Item No. 3403-0502-003	
Consistency:	Creamy, very soft
Application:	● ● ● ● ●
How many tires:	● ● ● ● ●
Lubricity:	● ● ● ● ●
Drying:	● ● ● ● ●



BLACK HARD Item No. 3401-0507-101	
Consistency:	Solid
Application:	● ● ● ● ●
How many tires:	● ● ● ● ●
Lubricity:	● ● ● ● ●
Drying:	● ● ● ● ●



WHITE HARD Item No. 3401-0507-001	
Consistency:	Solid
Application:	● ● ● ● ●
How many tires:	● ● ● ● ●
Lubricity:	● ● ● ● ●
Drying:	● ● ● ● ●



PRO TRANSPARENT HARD Item No. 3402-0507-003	
Consistency:	Solid
Application:	● ● ● ● ●
How many tires:	● ● ● ● ●
Lubricity:	● ● ● ● ●
Drying:	● ● ● ● ●



RUNFLAT Item No. 3401-0503-101	
Consistency:	Creamy, medium
Application:	● ● ● ● ●
How many tires:	● ● ● ● ●
Lubricity:	● ● ● ● ●
Drying:	● ● ● ● ●



BLACK SOFT Item No. 3401-0503-101	
Consistency:	Creamy, soft
Application:	● ● ● ● ●
How many tires:	● ● ● ● ●
Lubricity:	● ● ● ● ●
Drying:	● ● ● ● ●



WHITE SOFT Item No. 3401-0503-001	
Consistency:	Creamy, soft
Application:	● ● ● ● ●
How many tires:	● ● ● ● ●
Lubricity:	● ● ● ● ●
Drying:	● ● ● ● ●



PRO TRANSPARENT SOFT Item No. 3402-0503-003	
Consistency:	Creamy, soft
Application:	● ● ● ● ●
How many tires:	● ● ● ● ●
Lubricity:	● ● ● ● ●
Drying:	● ● ● ● ●

ITEM NO.	NAME	CONTENT AND VEHICLE TYPES										

UNIVERSAL

3401-0505-101	Black Universal	5 kg	●				●	●			
3401-0505-001	White Universal	5 kg	●				●	●			
3402-0505-003	PRO Transparent Universal	5 kg	●	●	●			●	●		

HARD

3401-0507-101	Black Hard	5 kg	●				●	●			
3401-0507-001	White Hart	5 kg	●				●	●			
3402-0507-003	PRO Transparent Hard	5 kg	●	●	●			●			

SOFT

3401-0503-101	Black Soft	5 kg	●	●			●	●			
3401-0503-001	White Soft	5 kg	●	●			●	●			
3402-0503-003	PRO Transparent Soft	5 kg	●	●	●			●	●		

PREMIUM

3404-0505-203	Runflat	5 kg	●	●	●			●			
3403-0502-003	Truck Mounting Creme	5 kg						●	●	●	●
3405-0505-003	PRO Tire Mounting Fluid	5 L	●	●	●			●	●	●	●

All products are biodegradable and chemically neutral to rubber, steel & aluminum. Working temperature: -10 to +50°C

ABOUT US
IMBALANCE
WEIGHTS
VALVES
TPMS
TOOLS
SERVICE



PERFECT SERVICE AT PERFECT EQUIPMENT®



SCAN ME:
Or order
directly in the
webshop!

ORDERING AT PERFECT EQUIPMENT®

Please note the individual product numbers from our current product catalogue to easily order the products at PERFECT EQUIPMENT®.

Select the required grammage for knock-on weights and replace the XX at the sixth and seventh digits.

SERVICE AT PERFECT EQUIPMENT®

PERFECT EQUIPMENT® represents highest customer satisfaction due to our friendly customer service representatives. Please contact us if you have any questions or need help with ordering processes. You can reach us at the following address:

WEGMANN automotive GmbH
Rudolf-Diesel-Straße 6 | D-97209 Veitshöchheim
Phone: +49 931 - 32104-230
E-Mail: cseu@wegmann-automotive.com

QUALITY AT PERFECT EQUIPMENT®

After we successfully received the DIN EN ISO 9001 certification in 1995, we successfully obtained the extensions in accordance with QS-9000 and VDA 6.1 in 1998.

In April of 1998, we were the first wheel balancing weight manufacturer in Europe to be certified in accordance with DIN EN ISO 9001, QS-9000 and VDA 6.1. The certifications in accordance with ISO/TS 16949: 2002 and ISO 14001 followed in 2004. Since May of 2010, we are certified according to ISO/TS 16949:2009 with product development as well as ISO 9001:2008 with product development and UM 14001:2009 with product development. In March 2015 we were additionally certified according to ISO 50001 (energy management system). Since 2018, we are certified to ISO 9001:2015 and IATF 16949 as well as to ISO 14001:2015.



SERVICE

ABOUT US

IMBALANCE

WEIGHTS

VALVES

TPMS

TOOLS

SERVICE

NOTES





WEGMANN automotive GmbH
Rudolf-Diesel-Straße 6 | D-97209 Veitshöchheim
Phone: +49 931 – 32104-0 | E-Mail: info@wegmann-automotive.com

www.perfectequipment.com
EUROPE PE catalogue English V03/26